

Enhancement of Power System Transient Stability using Superconducting Fault Current Limiters

Mårten Sjöström, Rachid Cherkaoui, Bertrand Dutoit

Electrical Department, Swiss Federal Institute of Technology, Lausanne, Switzerland

Abstract—Transient stability investigations consist in studying the rotor oscillations of generators (electro-mechanic oscillations, 0.1-2 Hz) followed by a fault of large amplitude, e.g. short circuit. The goal is to indicate if the generators are capable to stay synchronous after a fault has occurred. The fault duration is one of the most important factors to be given an answer. In fact, the shorter the fault, the more the maintaining of synchronisation can be guaranteed. Now in case of a fault, a fault current limiter has an extremely fast current transition in comparison with electro-mechanic time constants. This implies a quasi-instantaneous elimination of the fault through a limitation of the current and consequently a better ability to maintain the synchronisation of the system. We recall, in a classic system the elimination of a fault, by opening a circuit breaker, is carried out in two or three cycles in the best case. We have here studied a simple, radial electric network configuration with a machine and an infinite network. The study covers simulations of different faults that can occur in a network and the consequences of the recovery time of the fault current limiter.

I. INTRODUCTION

Due to political and ecological reasons, it is today more and more difficult to obtain authorisations to extend or reinforce a power system in order to respond to the evolution of electric consumption. Consequently, the power system is exploited to the limits of stability maintained by the generators. For a power system in a stable condition, the generators operate in synchronism in order to respect the frequency of the power system. This means that there is an equilibrium between the consumed and produced power in this power system. When a fault such as a short-circuit appears, this situation of synchronous equilibrium may momentarily (damped oscillations) or definitively be lost, depending on the case. The maintaining of power system stability is conditioned by the fault duration, among others. The shorter the duration, the more the return to a stable state after a fault is guaranteed. In fact, during a fault the voltage drop causes a corresponding drop of the power transmitted to the network

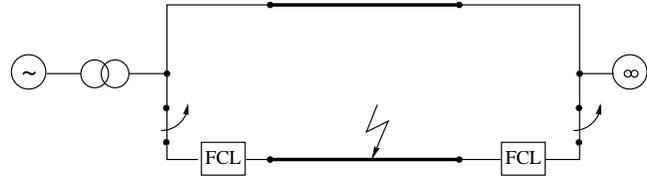


Fig. 1. Simulated system: A generator supplying power to an infinite network via a transformer and two parallel transfer lines. A short-circuit is simulated in one line.

and therefore the generators accelerate and acquire an increase of kinetic energy which is larger with longer fault duration. After the fault has been eliminated and if the power system is capable to suppress this excessive kinetic energy, it will find a state of stable operation. Therefore, it is evident that the kinetic energy surplus must be as small as possible. The elimination of the fault is made by opening circuit-breakers. The fastest circuit-breakers of today permit to interrupt the current in 40 to 60 ms (2-3 50Hz cycles). This duration may prove insufficient depending of the fault location, e.g. at the generator terminal. Now, if a superconducting current limiter is inserted in a power system, the elimination of the fault is accomplished quasi-instantaneously. This is due to the transition from a superconducting to a normal state of the superconducting element when the critical current is exceeded. In theory, one can anticipate that the stability of a power system equipped with a superconducting fault current limiter (FCL) may be maintained independently of the fault severity.

II. SIMULATED CASE AND MODELS

To investigate how well the superconducting FCL can influence the stability of the power system, we have studied a simple power system consisting of a generator supplying power to an infinite network via a transformer and two parallel transfer lines, see Fig. 1. We have simulated a fault in one of the transfer lines at a certain time instant and considered the evolution of the generator angle in presence and absence of a FCL until the current was interrupted by the circuit-breakers in the faulty line.

We have applied classical models for the conventional circuit elements used in stability investigations. In conventional stability simulations, complex ($j\omega$) models are normally utilised since ω does not change significantly. As

Manuscript received September 15, 1998.

Author emails: EPFL: Marten.Sjostrom@epfl.ch,
Rachid.Cherkaoui@epfl.ch, Bertrand.Dutoit@epfl.ch.

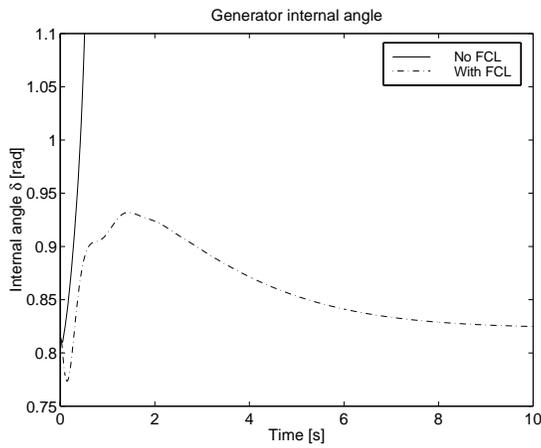


Fig. 4. Evolution of the internal angle δ of the generator due to a short circuit in one of the lines. The system becomes unstable and the generator accelerated uncontrollably when no FCL is used ($\delta \rightarrow \infty$). The FCLs stabilises the system to return to a stable state (δ returns to equilibrium point).

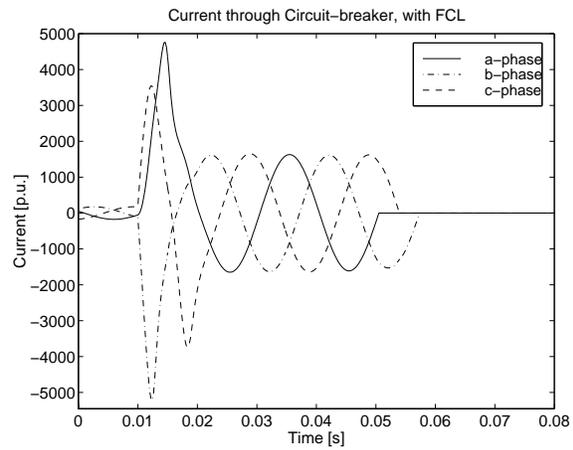


Fig. 6. The current through the circuit-breaker closest to the generator when a FCL is used. The FCLs reduce the amplitude considerably.

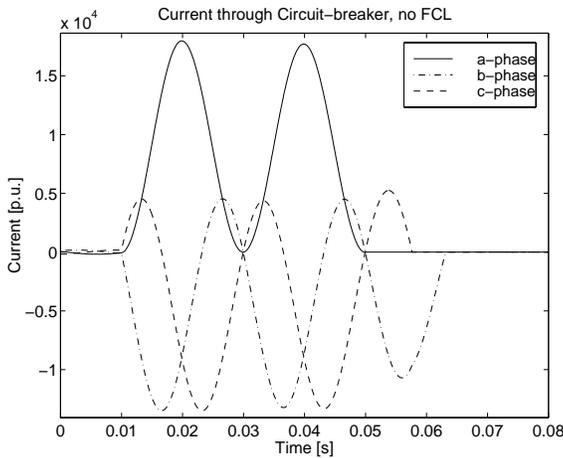


Fig. 5. The current through the circuit-breaker closest to the generator when no FCL is used.

parallel FCL might be necessary.

IV. CONCLUSIONS

We have considered a simple power system in the perspective of stability. It was shown that the system stability can be increased by introducing superconducting fault current limiters (FCLs) at strategic points, which is due to their fast transition from low to high resistance. A real power system is normally of a much higher complexity. Such a meshed power system would need a larger number of FCLs. A problem is that a short-circuit affects the currents not only in the line with the fault but in neighbouring lines as well. It is undesirable to have all FCLs to react, so more research is required to coordinate the FCLs in the system and to optimise their position. By such investigations, large systems must be considered. It

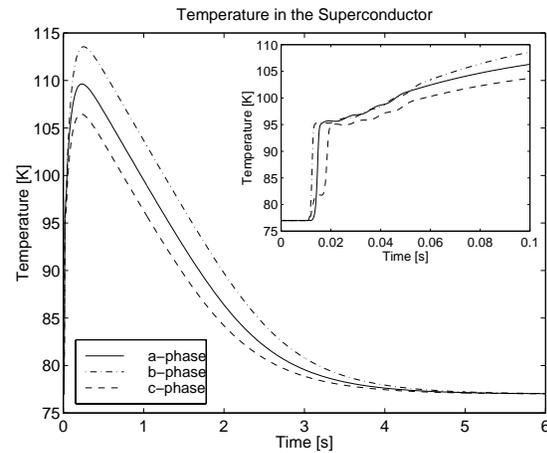


Fig. 7. Temperature in FCL closest to the generator. The recovery time is too long for todays security systems which reconnect after 2-3 cycles (40-60 ms). The inset shows the temperature evolution just after the short-circuit at $T = 0.01$ s.

is therefore desirable to use simplified models to speed up simulations. The FCL model presented here can then be somewhat simplified without loss of generality. The simulations also show that the recovery time of a superconducting FCL is too long for todays security systems.

REFERENCES

- [1] E.W. Kimbark, "Power System Stability: Elements of Stability Calculations" *Vol. 1, IEEE Press Power Systems Engineering Series*, 1995.
- [2] H. Elmquist, D. Brück and M. Otter, *Dymola - Dynamic modelling laboratory*, Dynasim AB, Sweden, 1996.