

Elimination of micropollutants in wastewater treatment plants

Ozonation or activated carbon? Conclusions of a one-year pilot project

J. Margot¹, A. Magnet², D. Thonney², N. Chèvre³, F. de Alencastro¹, C. Kienle⁴, C. Abegglen⁵, D.A. Barry¹, L. Rossi¹

¹ Ecole Polytechnique Fédérale de Lausanne (EPFL), Switzerland (jonas.margot@epfl.ch); ² Wastewater treatment plant of Lausanne, Switzerland; ³ University of Lausanne, Switzerland; ⁴ Swiss Centre for Applied Ecotoxicology, Eawag/EPFL, Dübendorf, Switzerland; ⁵ Swiss Federal Institute of Aquatic Science and Technology (Eawag), Dübendorf, Switzerland

Introduction & Objectives

Many micropollutants present in municipal wastewater, such as pharmaceuticals and pesticides, are poorly removed in conventional wastewater treatment plants (WWTPs)

To reduce the release of these substances into the aquatic environment, advanced treatments are necessary and may be soon mandatory in Switzerland

In order to evaluate the efficiency of different advanced treatments, **two technologies were tested** in parallel in pilot systems over more than one year at the municipal WWTP of Lausanne, Switzerland (220,000 population equivalent, activated sludge treatment):

- Elimination of the pollutants by oxidation with **ozone**
- Elimination of the pollutants by adsorption onto **powdered activated carbon (PAC)**

The objectives of this study were to:

- Evaluate the efficiency of these two technologies in real conditions to reduce the concentration of micropollutants and the toxicity in wastewater
- Determine the optimal operating conditions, the costs and the energy requirements of these processes

Materials & Methods

Ozonation – sand filter (SF) pilot system (capacity 100 l/s)

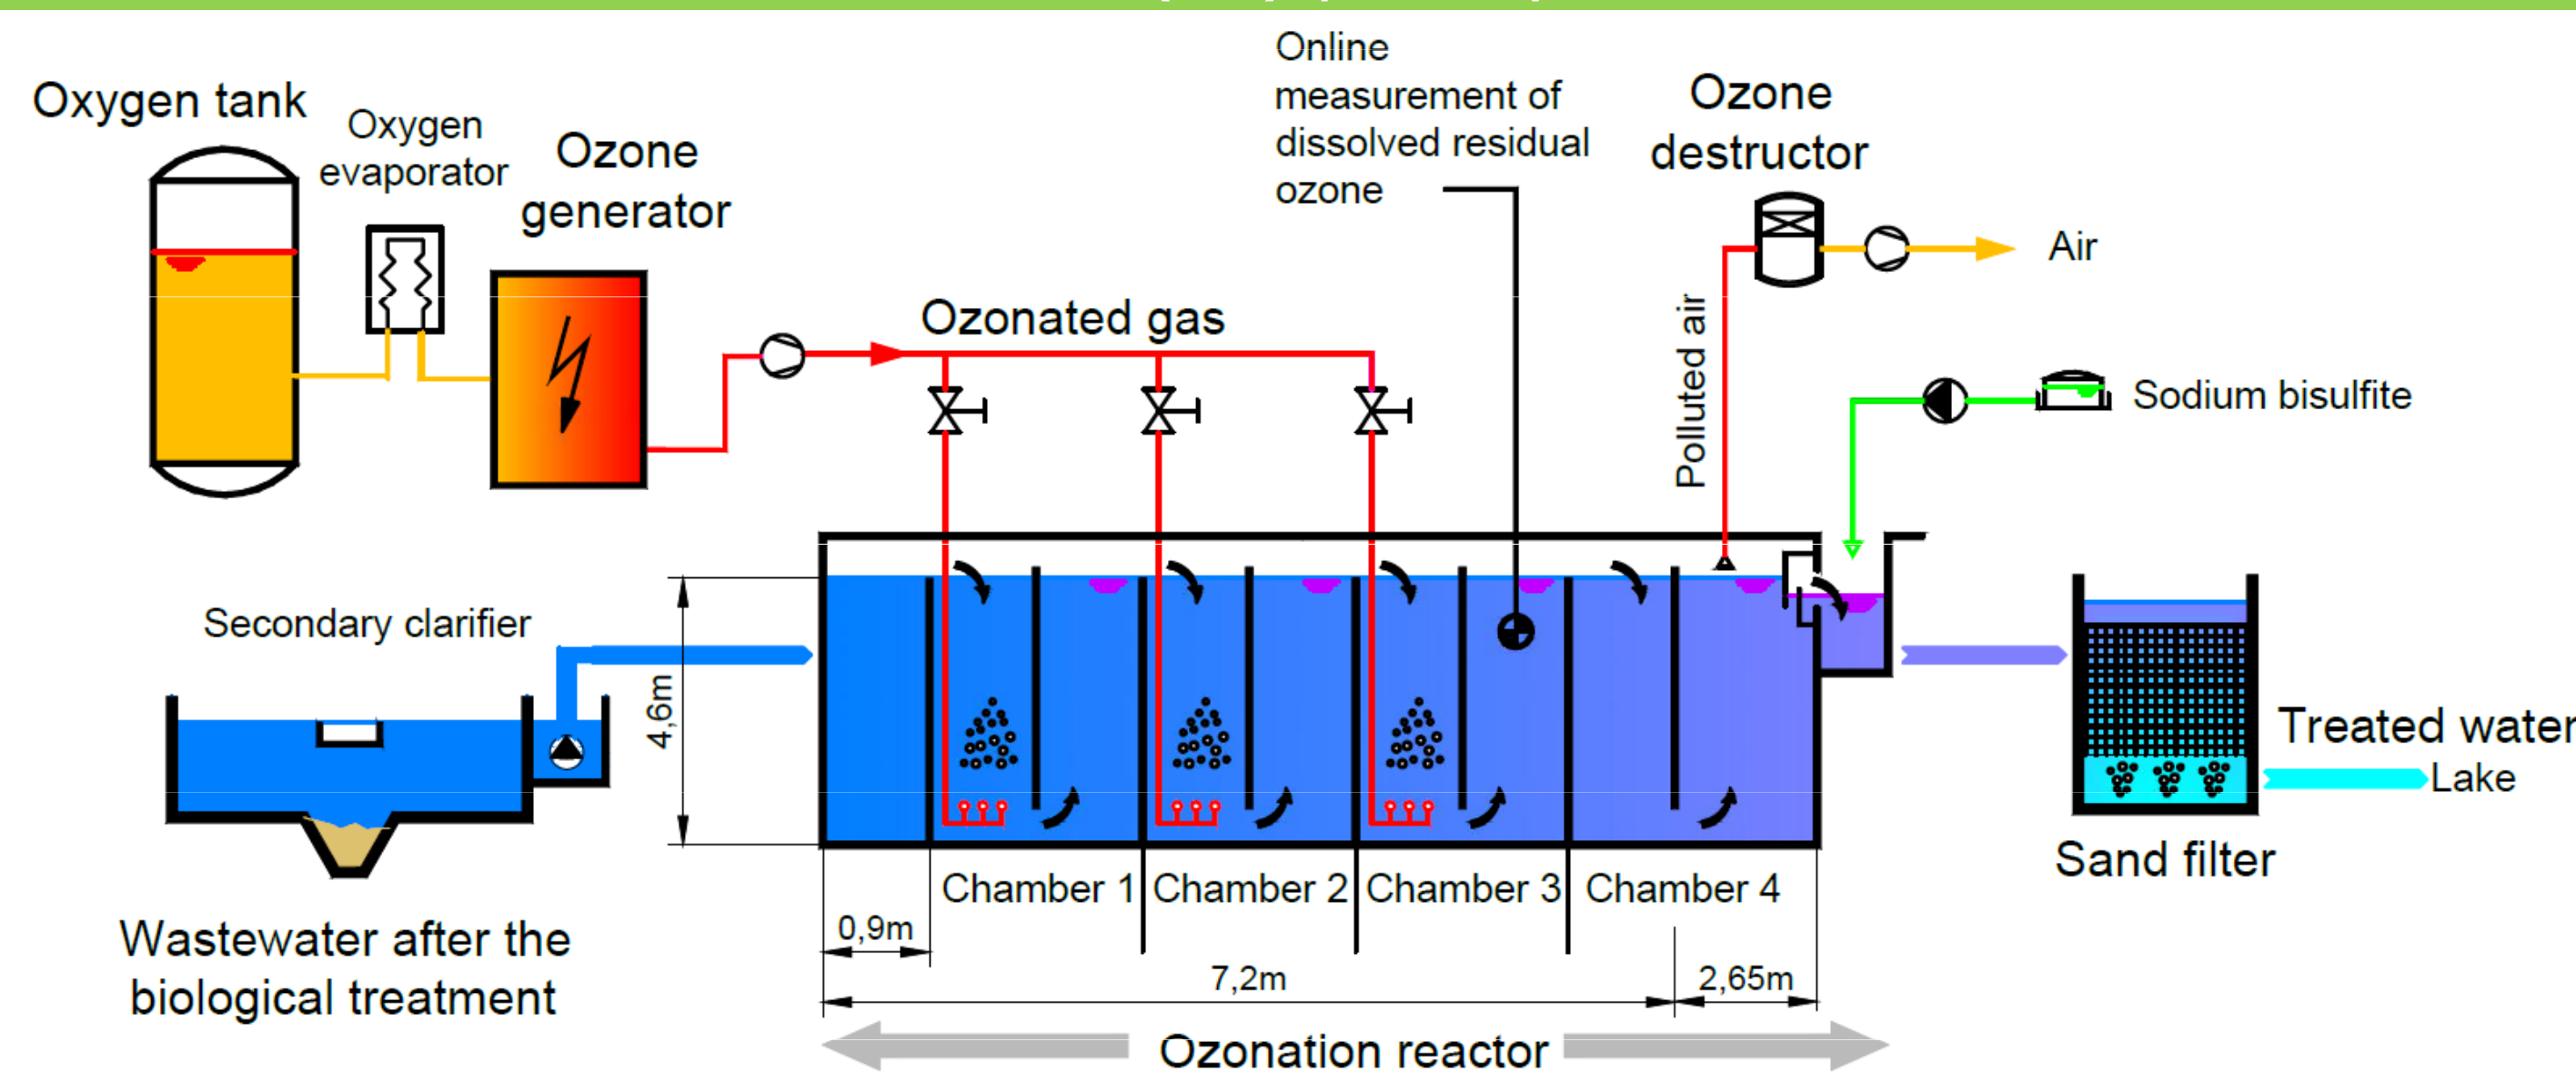


Figure 1. Ozone is produced from pure oxygen and injected into wastewater to oxidize organic substances (contact time: > 20 min). The quantity injected (1 to 15 mg O₃/l) is regulated to maintain a constant dissolved residual ozone concentration (0.1 mg O₃/l) at the end of room 3. The reactor is followed by a biologically active sand filter to remove the readily biodegradable reaction products

Powdered activated carbon-ultrafiltration system (PAC-UF) (capacity 10 l/s)

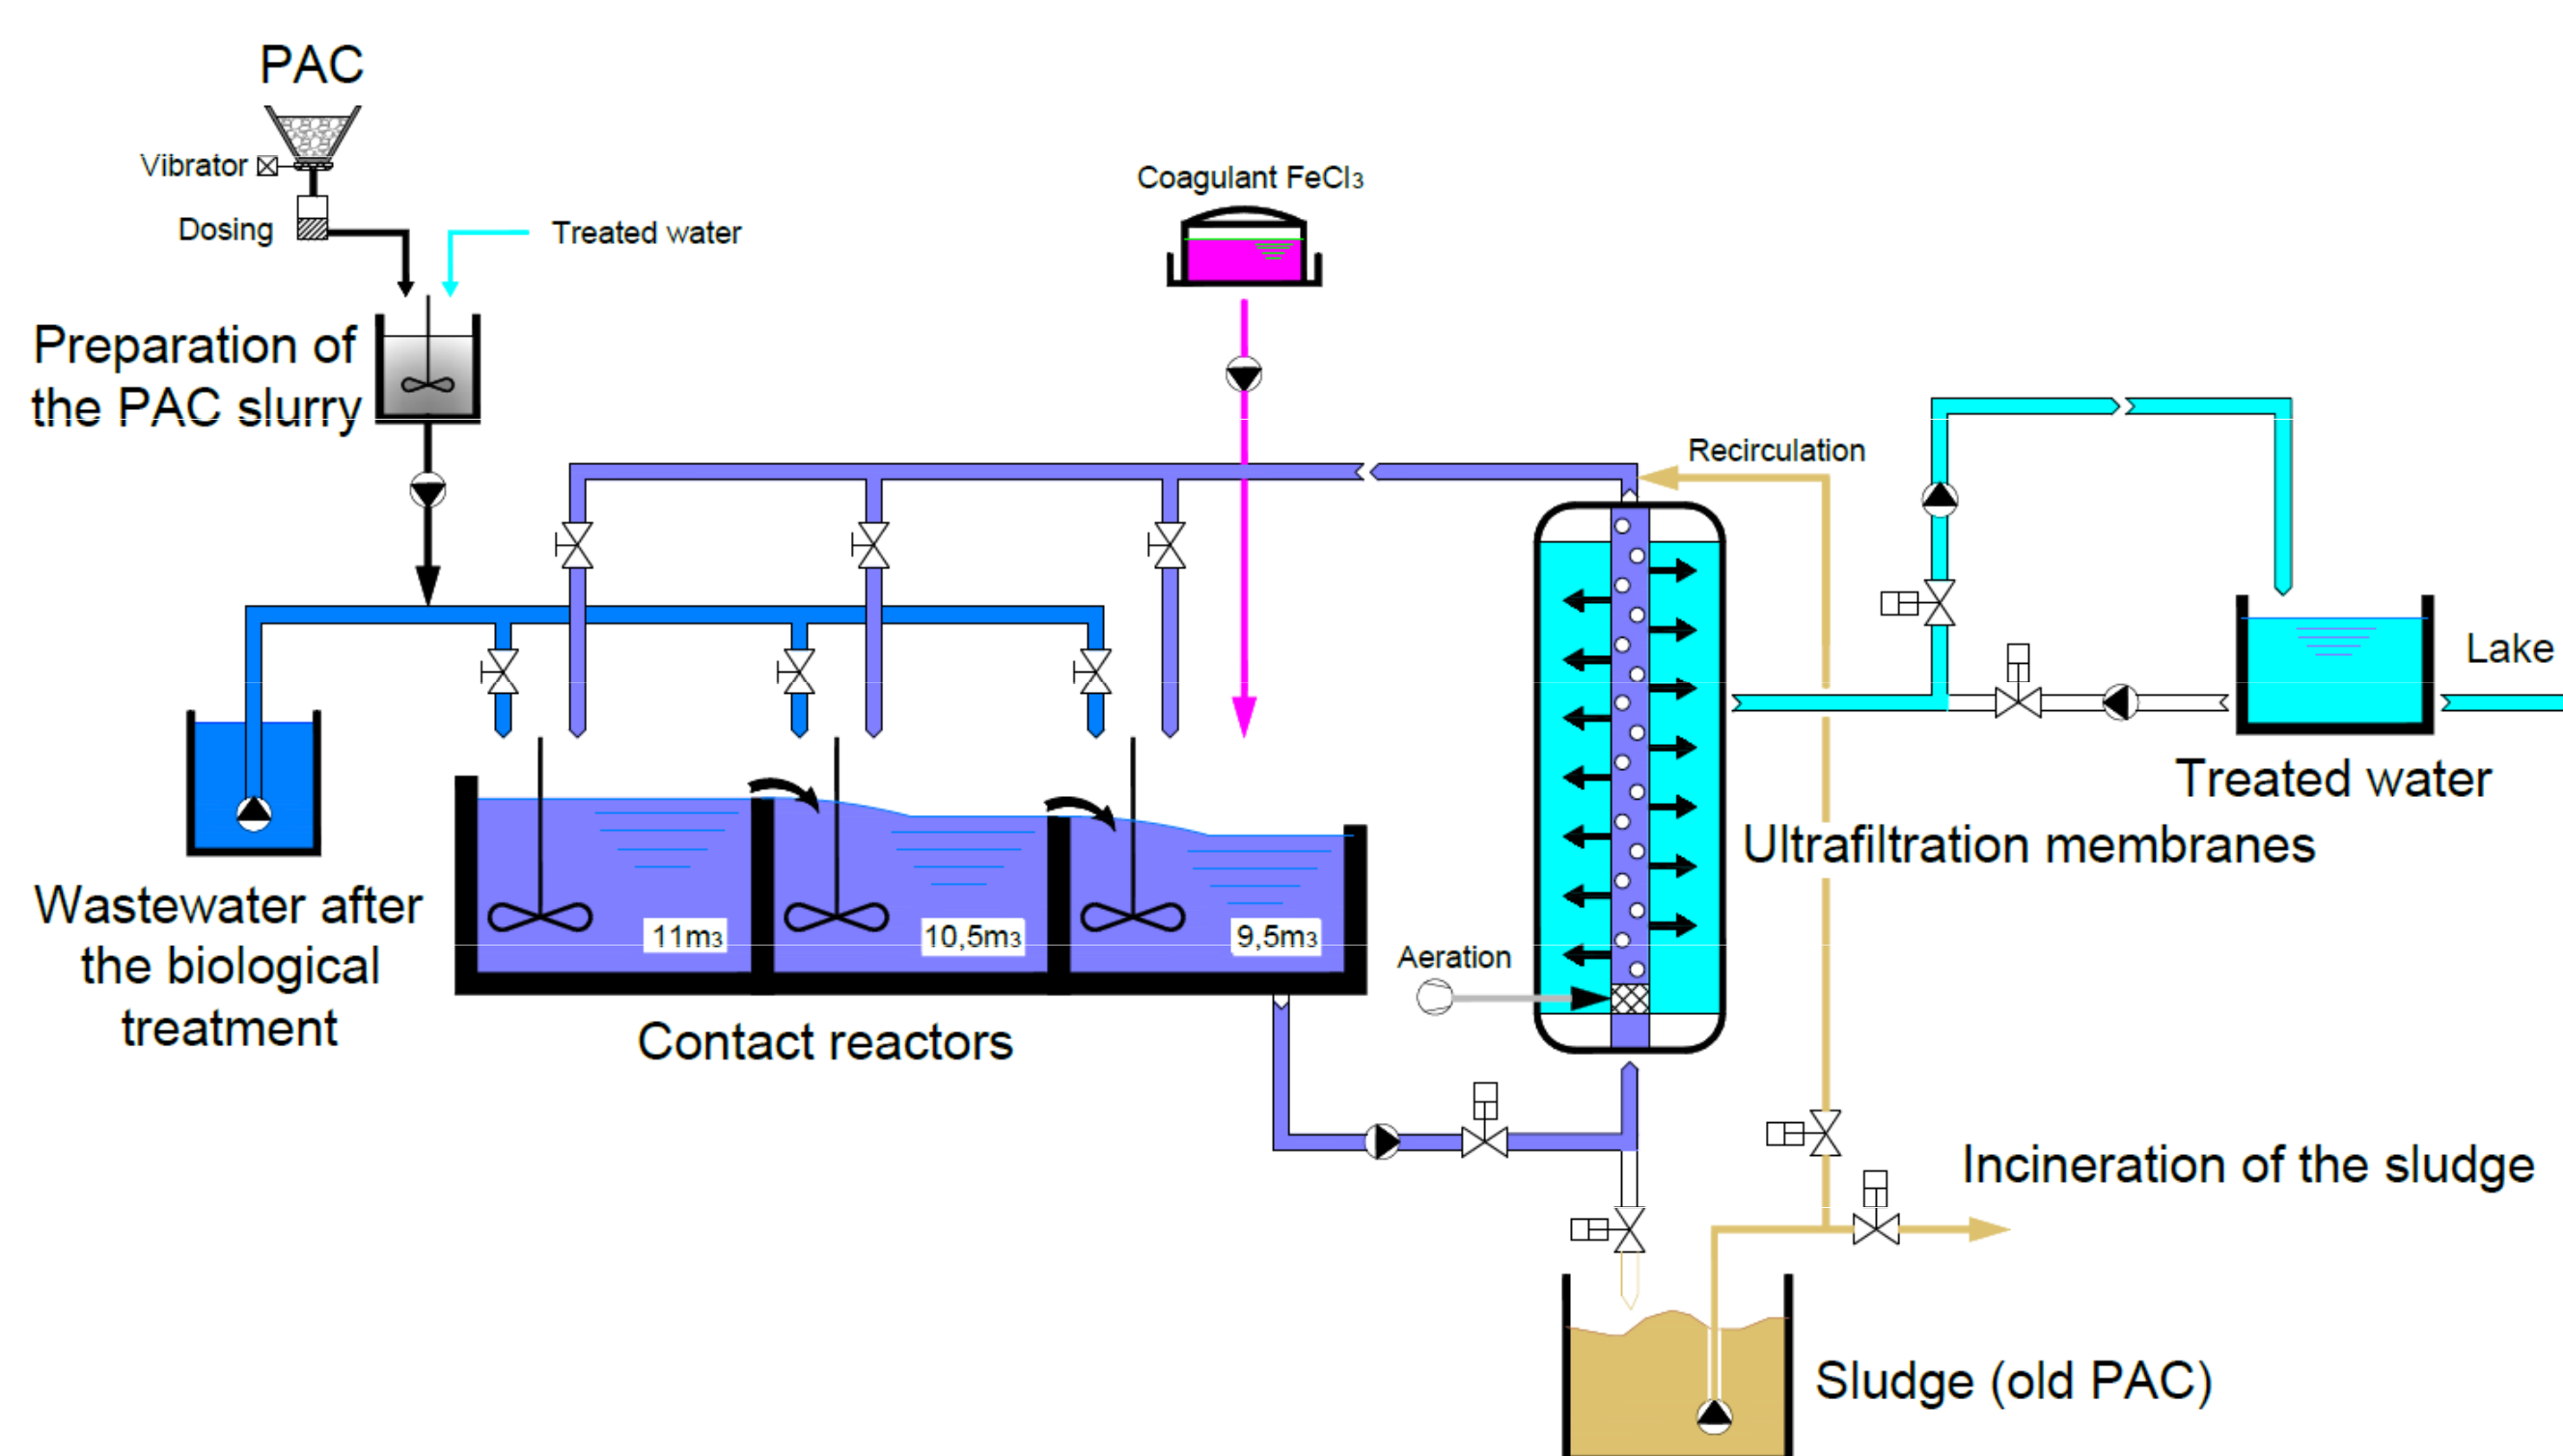


Figure 2. PAC slurry is introduced into wastewater to obtain a constant dosage of 10 to 20 mg/l. After a sufficient contact time (> 30 min), water is filtered with either ultrafiltration membrane (pore size of 30 nm) or sand filter and the retained PAC is reinjected in the contact reactor to obtain a sludge age of 2 d. Saturated PAC is finally incinerated with the adsorbed pollutants

Efficiency monitoring

- 24 **sampling campaigns** of 1 d and 4 longer campaigns of 7 d (composite samples taken every 15 min) were done before and after each treatment during 1 y
- 58 potentially **problematic substances** (36 pharmaceuticals, 13 biocides and pesticides, 2 corrosion inhibitors and 7 endocrine disruptors) were analysed in the dissolved phase by solid phase extraction followed by ultra performance liquid chromatography coupled to a tandem mass spectrometer (UPLC-MS/MS)
- A large battery of **ecotoxicological tests** was done during the 4 longer campaigns before and after each treatment:
 - 16 *in vitro* assays: mutagenicity, genotoxicity, estrogenicity and other hormonal effects
 - 9 *in vivo* assays: **acute toxicity** on bacteria and fish (*Vibrio fischeri*, *Danio rerio*), **chronic toxicity** on algae, aquatic plants, crustaceans, gastropods, worms and fish (*Pseudokirchneriella subcapitata*, *Lemna minor*, *Ceriodaphnia dubia*, *Gammarus fossarum*, *Potamopyrgus antipodarum*, *Lumbriculus variegatus*, *Oncorhynchus mykiss*)

Results & Discussion

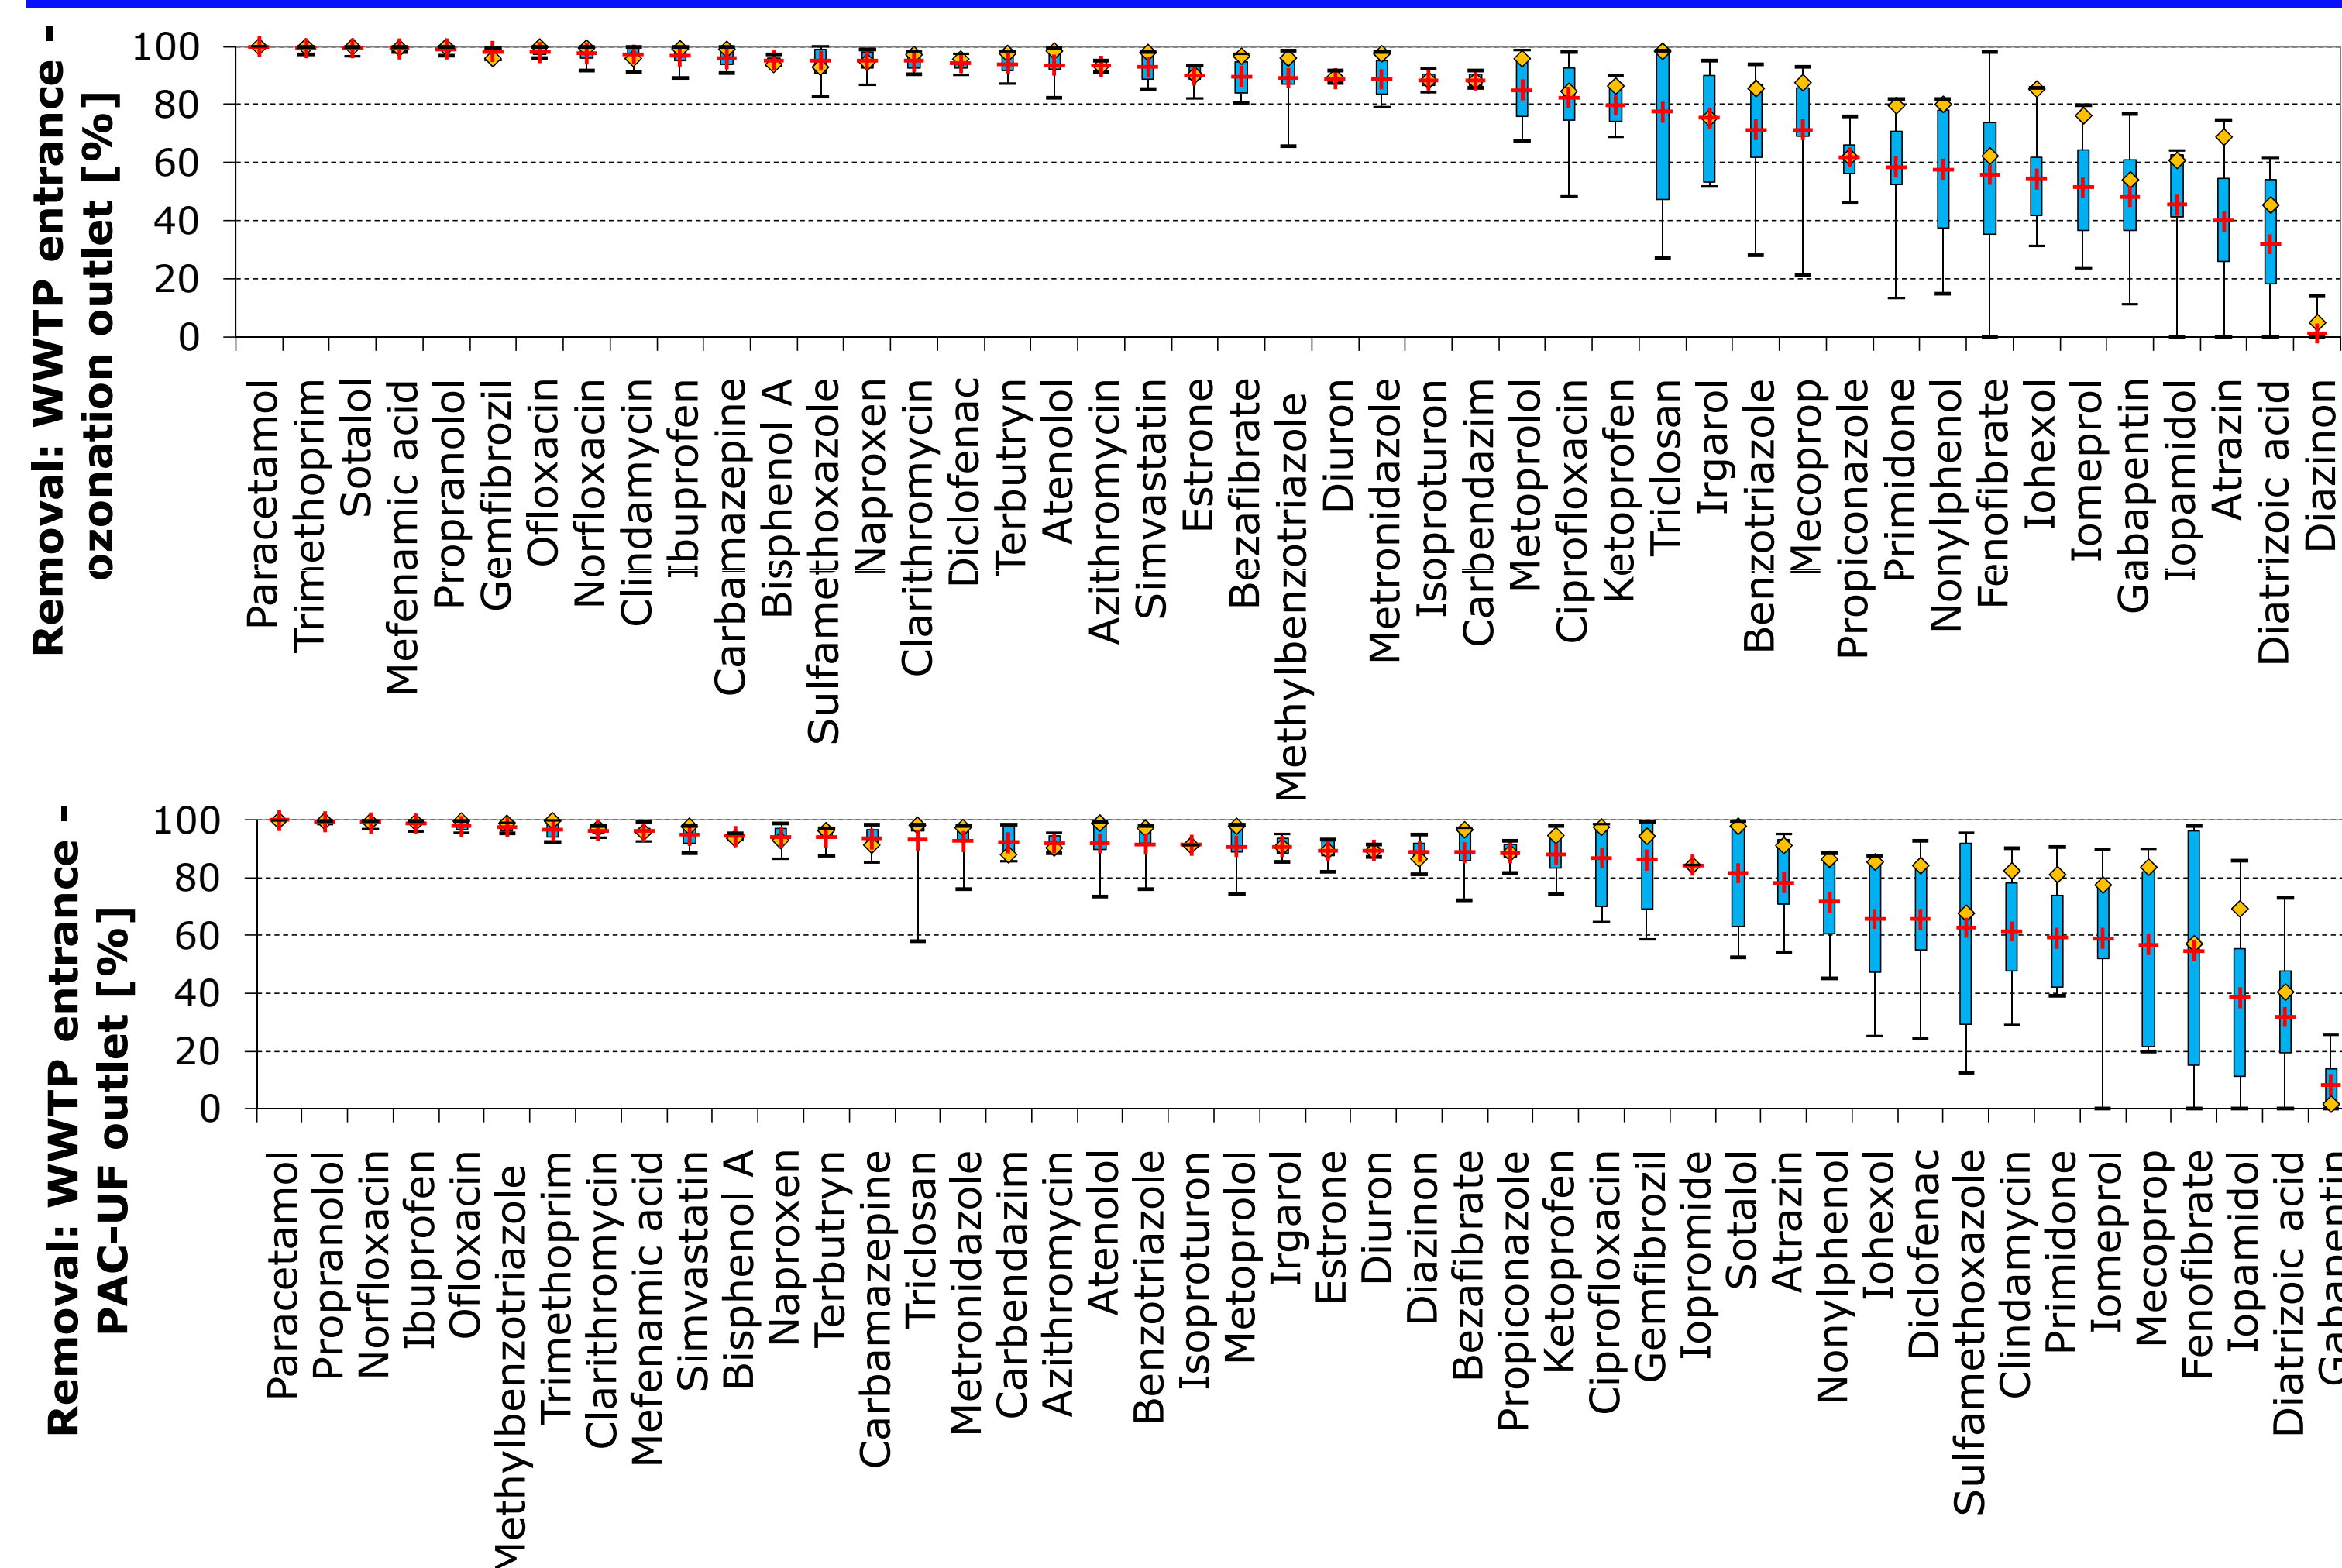


Figure 3. Elimination of micropollutants between the WWTP entrance and the outlet of either the ozonation (3 to 7 mg O₃/l, top chart) or the PAC-UF treatment (10 to 20 mg PAC/l, bottom chart). Boxplot with the minimum/maximum, the quartile and the mean (+) of 12 analyses. The diamond (♦) represents optimized operational conditions (6.7 mg O₃/l or 20 mg PAC/l)

- On average, **same efficiency for both treatments** (> 80%, compared to less than 50% in the biological treatment)
- Some substances better eliminated with one or the other treatment
- Some substances not well eliminated with both treatments in the tested conditions: e.g. X-ray contrast media, gabapentin, fenofibrate
- **Clear toxicity decrease** during ozonation and PAC-UF for most of the bioassays
- Effluents of the advanced treatments are not toxic in most of the tests
- **No genotoxicity or mutagenicity** after advanced treatments

Comparison: Ozone & Activated Carbon

Criteria	Ozone + SF	PAC + UF	PAC + SF
Measured/estimated on the pilot systems			
Micropollutants removal (a)	> 80% on average (with 5.5 g O ₃ /m ³). Substances not completely degraded (by-product formation)	> 80% on average (with 10 to 20 g PAC/m ³). If PAC is incinerated, substances are completely destroyed	
Toxicity reduction (a)	Good (> 80% in most <i>in vitro</i> bioassays)	Very good (> 90% in all <i>in vitro</i> bioassays)	Not tested
Water disinfection	Yes, partially	Yes, totally	No
Improving other water quality parameters	Yes, due to the sand filter	DOC reduction due to the PAC and strong global improvement due to the membranes	DOC reduction due to the PAC and global improvement due to the sand filter
Waste production	No	Increase by 10% the sludge production of the WWTP	
Electricity consumption	0.11 kWh/m ³	0.50 - 0.90 kWh/m ³ (c)	0.08 kWh/m ³
Operation cost (€)(b)	ca. 3 to 4 cents/m ³	ca. 20 to 30 cents/m ³ (c)	ca. 4 to 5 cents/m ³
Investment cost (€)(b)	ca. 10 cents/m ³	ca. 15 to 30 cents/m ³	ca. 7 to 10 cents/m ³
Footprint	ca. 1000 m ² /(m ³ /s)	ca. 5000-7000 m ² /(m ³ /s)	ca. 1400 m ² /(m ³ /s)
General considerations			
Risks for the staff	Need trained staff (toxic substance). Safety system required	Low risk	
Risks for the environment	Risk of forming potentially toxic by-products	Technique unsuitable in case of land application of the sewage sludge. PAC production can have significant environmental impacts	
Type of WWTP that can use this process	Need permanent and trained staff	Implementation possible in all types of WWTP	

(a) Including biological treatment (b) Based on local Swiss costs (c) Complementary tests with other membrane configurations show that this value could be divided by 2 or 3

Conclusions

- Both processes (ozonation and PAC addition) are effective in reducing the release of micropollutants into surface waters
- Ozonation-SF and PAC-SF proved to be feasible in terms of implementation and operation at large-scale in WWTP, for relatively similar investment and operation costs
- The energy requirement and the cost of the global wastewater treatment would increase by 20 to 30%
- Each process has its advantages and disadvantages. The selection of one solution should be made case by case for each WWTP depending on the local constraints (space, security, energy cost, sludge disposal process, size of the plant, existing treatment processes, need for disinfection, wastewater composition, etc.) and the desired output water quality

This study was conducted by the sanitation service of the city of Lausanne, mandated by the Swiss Federal Office for the Environment (FOEN), with the support of the canton of Vaud

More information: www.lausanne.ch/micropolluants