

Probing molecular absorption under slow light propagation using a photonic crystal waveguide

Isabelle Dicaire^a, Alfredo De Rossi^b, Sylvain Combrié^b, Luc Thévenaz^{*, a}

^aÉcole Polytechnique Fédérale de Lausanne, STI-GR-SCI Station 11, 1015 Lausanne, Switzerland

^bThales Research and Technology, Route Départementale 128, 91767 Palaiseau Cedex, France

ABSTRACT

High-resolution infrared absorption spectroscopy of acetylene gas is demonstrated in dispersion-engineered photonic crystal waveguides under slow light propagation. Individual absorption profiles are obtained for both TE and TM polarizations for group indices ranging from 1.5 to 6.7. Experimental enhancement factors of 0.31 and 1.00 are obtained for TE and TM polarization, respectively, and are confirmed by time-domain simulations. We experimentally demonstrate that molecular absorption is a function of the electric field distribution outside the photonic crystal slab and the group index under structural slow-light illumination.

Keywords: Photonic crystals, Slow light, Gas sensing, Infrared spectroscopy

1. INTRODUCTION

Photonic crystal (PhC) waveguides are attractive evanescent field devices for the detection of hazardous gases and analytes in aqueous environment. They require small sample volumes and short response times due to their ultracompact dimensions. Refractive index sensing was recently demonstrated in PhC waveguides using PhC optical cavities with air slots embedded in the defect region [1-3]. While this technique allows for very sensitive measurements of refractive index changes it cannot specifically identify the chemical species under study. In this case infrared (IR) absorption spectroscopy is a powerful and highly selective technique that can identify molecular species from their individual spectroscopic fingerprint. The Beer-Lambert law describes the intensity of a light signal decaying through an absorbing medium:

$$I = I_0 \exp(-\Gamma \alpha L), \quad (1)$$

where I_0 is incident light intensity, α is the highly-selective wavelength-dependent absorption coefficient, L is the optical path length, and Γ is the absorption enhancement factor. Since the optical path length is notably small in PhC waveguides it was previously suggested to use slow light propagation to locally enhance light-matter interactions, thus enhancing the absorption sensitivity [4]. Gas sensing measurements of carbon dioxide gas and methane gas were recently performed in dispersion-engineered bulk PhCs and PhC waveguides, respectively [5-6]. Experimental enhancement factors Γ of 2-3 were reported in [5] for group indices of $n_g \sim 2$ while higher absorption sensitivity was reported in [6] but the associated enhancement factors were not experimentally obtained.

In this paper high-resolution IR absorption spectroscopy of acetylene gas is demonstrated in dispersion-engineered GaInP PhC waveguides under slow light propagation. Individual absorption profiles are obtained for both TE and TM polarizations for group indices ranging from 1.5 to 6.7. Experimental enhancement factors are obtained by measuring the corresponding absorption coefficients under free-space propagation for exactly the same path length. The gas sensing measurements are confirmed by numerical simulations of molecular absorption from the evanescent field of PhC waveguides in the presence of wavelength-dependent dispersion.

*luc.thevenaz@epfl.ch; phone +41 21 693 4774; <http://gfo.epfl.ch>

2. EXPERIMENTAL PROCEDURE

The PhC waveguide samples used in this study consist of a 180nm-thick GaInP slab with a triangular lattice of air holes having a lattice constant of 486 nm and a defect line. To modify their structural dispersion properties, the size of the first row of holes was increased from 204 nm to 233 nm in the first sample and from 224 nm to 253 nm in the second sample. The 1.5mm-long waveguides include mode adapters on both end facets to gradually build the slow-light mode and to reduce Fabry-Perot oscillations due to the strong impedance mismatch between incident modes (free-space or optical fiber modes) and waveguides modes [7].

Molecular spectroscopy was performed in PhC waveguides using the following experimental procedure. The optical coupling setup comprising two micropositioning stages and a moving sample holder was placed inside a gas chamber having optical feedthrough for remote monitoring. Lensed optical fibers having a working distance of 14 μm provided optical coupling to the PhC waveguides while making fully negligible the absorption of incident and transmitted light by gaseous molecules. An optical imaging setup consisting of a microscope objective, illumination system and IR-sensitive camera was used to ensure accurate optical coupling between the lensed fibers and PhC waveguides. The polarization state incident on the samples was set to TE and TM independently using a linear polarizer providing a fixed arbitrary polarization followed by a polarization controller. The TE polarization state was verified by observing a cut-off in the transmission spectrum of a PhC waveguide using an optical spectrum analyzer (OSA) and a broadband source emitting in the range 1520-1570 nm. TM polarization was set by observing no spectral cut-off on the OSA, indicating that light no longer experienced multiple reflections by the periodic PhC structure.

The gas chamber was then hermetically closed and air was evacuated using a vacuum pump without causing any significant change in transmitted intensity ($\pm 1\text{dB}$). The gas chamber was filled with 50 torrs (67 mbars) of acetylene gas; this value was chosen to maximize absorption coefficients while keeping narrow linewidths. To obtain high-resolution absorption profiles the injection current of a distributed-feedback (DFB) laser diode operating at 1534.1 nm was modulated as a ramp signal to sweep the DFB laser line across the P15 absorption line. Absorption profiles were measured using a 125 MHz photodiode coupled to an oscilloscope referenced to the ramp signal frequency. Pressure conditions were monitored using a Baratron capacitance manometer and wavelength information was retrieved using a Burleigh WA-1000 wavemeter. Group indices were measured using an optical frequency domain interferometric technique comprising a tunable laser source and a Mach-Zehnder interferometer with the PhC waveguide sample placed in one arm and followed by digital filtering.

3. EXPERIMENTAL RESULTS

The experimental acetylene absorption lines obtained using dispersion-engineered PhC waveguides are presented in Fig. 1 for both TE and TM polarizations (blue and green solid curves, color online) and for two different waveguides with different n_g values. The dashed curve represents absorption under free-space propagation for exactly the same path length ($L=1.5$ mm, Gaussian fit of dotted profile).

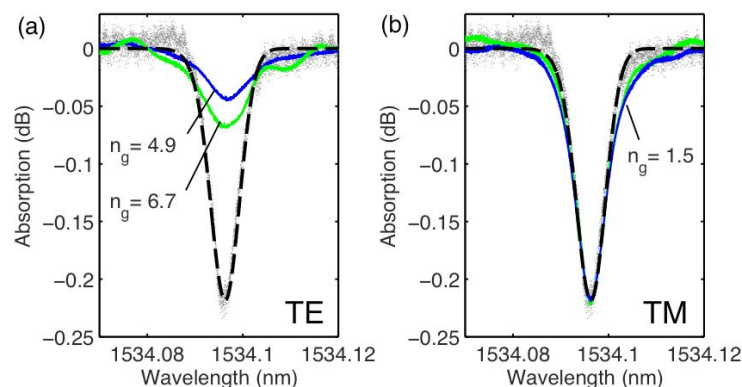


Figure 1. (a) Acetylene P15 absorption line for the TE polarization for $n_g=4.9$ (blue) and $n_g=6.7$ (green). Experimental free-space absorption (dotted profile) and its Gaussian fit (dashed curve) are also shown. (b) Same for TM polarization, $n_g=1.5$ for the two PhC waveguide samples. Lineshape details can be found in Table 1.

4. ANALYSIS OF EXPERIMENTAL ABSORPTION PROFILES

As illustrated in Fig. 1, the experimental absorption efficiency is greater for the TM polarization with $n_g=1.5$ than for the TE one for which $n_g = [4.9; 6.7]$; this is a very surprising result considering the expected enhancement of molecular absorption due to slow light propagation that occurs only for the TE mode. This is due to the fact that for TE polarization most of the electric field is located inside the high-index dielectric slab while for TM polarization the electric field is enhanced in the lower-index material. Boundary conditions at material interfaces state that for an electric field perpendicular to the high-index dielectric slab (i.e. TM pol.) the electric displacement field $D = \epsilon E$ must be continuous at its interface, resulting in a relative evanescent electric field enhancement of $\epsilon_{slab} / \epsilon_0$ for TM polarization and a continuous weak evanescent field for TE polarization. Such low electric field intensities for TE-polarized light can be circumvented by adding a narrow air slot in the defect region of a PhC waveguide, thereby causing a large field discontinuity for the TE polarization and electric field enhancement in the air slot [8].

To experimentally compare the dependence of absorption efficiencies on group indices several conditions must be satisfied. One important requirement is that the measured profiles should have the same linewidths since the absorption efficiency will depend on the absorption linewidth for any Lorentzian or Gaussian profile. The intensity of the electric field $|E|^2$ located within the lower index material should also be identical for all measurements. Table 1 presents the characteristics of the experimental absorption profiles for both TE and TM polarizations.

Table 1. Characteristics of experimental and simulated absorption coefficients

Line	Group Index	Linewidth [GHz]	Experimental Absorption [dB]	Experimental Enhancement	Simulated Enhancement
TE	4.9	1.4 ± 0.1	0.044 ± 0.001	0.20 ± 0.01	0.19
TE	6.7	1.5 ± 0.3	0.068 ± 0.001	0.31 ± 0.02	0.25
TM	1.5	0.94 ± 0.01	0.219 ± 0.001	1.00 ± 0.05	1.12
Free space	1.0	0.87 ± 0.05	0.22 ± 0.01	1.00 ± 0.05	1.00

Since TE-polarized absorption profiles have approximately the same linewidth and mode field distribution the absorption efficiencies can be directly compared to group indices. One finds that $A(n_g=4.9)/A(n_g=6.7) \approx 4.9/6.7$, i.e. the absorption coefficient is approximately linearly proportional to n_g when all other relevant quantities are equal.

5. THEORETICAL ABSORPTION COEFFICIENT IN PHC WAVEGUIDES

To confirm this linear dependence time-domain simulations of molecular absorption were realized using our own implementation of a Finite-Difference Time-Domain (FDTD) algorithm with appropriate boundary conditions [$E(x+a) = E(x) \cdot \exp(i \cdot k \cdot a)$, with a the lattice period and k the wavevector]. The electromagnetic field distributions and dispersion relation obtained using the FDTD algorithm were then used to calculate absorption enhancement factors. Theoretically the absorption coefficient is given by the coupling between the electric field of the optical wave and the electric dipole induced by the bound orbiting electrons of molecules, divided by the Poynting vector averaged over the waveguide cross section:

$$\alpha = -\frac{dI}{I \cdot dx} \approx \frac{\Im[\epsilon] \int |E|^2 dV/2}{\Re \left[\int_A E \times H^* dA \right]}, \quad (2)$$

where H is the magnetic field, ϵ is the complex electric permittivity, and the functions \Re and \Im denote the real and imaginary parts of a complex number. Since the Poynting vector is proportional to the velocity of the electromagnetic energy v_{EM} , Eq. (2) reduces to the following expression (where f_E is the overlap fraction of the electric field with absorbers):

$$\alpha \propto n_g \cdot f_E, \quad (3)$$

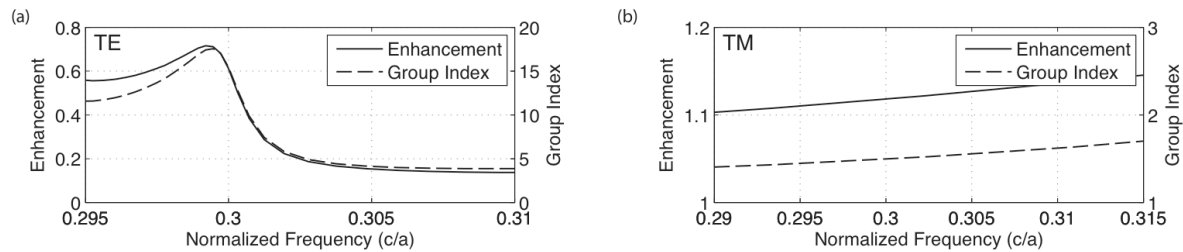


Figure 2. (a) Simulated enhancement factors (solid line) and group indices (dashed line) as a function of the normalized frequency for TE-polarized light. (b) Same for TM-polarized light.

which is valid in photonic crystal waveguides since $v_{EM}=v_g$ in such structures [9]. Figure 2 presents the theoretical absorption coefficient normalized by that obtained in free-space propagation for both TE and TM polarizations.

As expected, there is no absorption enhancement for the TE polarization due to low electric field overlap fractions while strong absorption is obtained for TM polarization due to the electric field enhancement resulting from its discontinuity at the dielectric interface. Experimental and theoretical absorption coefficients are compared in Table 1 and agree within 20 percent, confirming the linear dependence of molecular absorption on the group index.

6. CONCLUSION

We have demonstrated high-resolution IR absorption spectroscopy of acetylene gas in dispersion-engineered PhC waveguides having group indices ranging from 1.5 to 6.7. Experimental enhancement factors were confirmed by modeling molecular absorption as a function of the evanescent electric field and the group index under structural slow-light illumination. These results indicate that the distribution of the electric field intensity is fundamental in gas-sensing measurements and must not be confused with the optical intensity distribution: they are two entirely different quantities in PhC waveguides. Practically, it turns out that enhancing the electric field intensity overlapping the absorbers shows a more decisive impact on the absorption enhancement than searching for extreme group index rising.

ACKNOWLEDGMENTS

This work is funded by the European Space Agency (ESA) through Grant No. 20200/06/NL/PA and by the Swiss National Office for Education and Research through Project COST C06.0015 and SNF 20020-121860.

REFERENCES

- [1] Di Falco, A., O'Faolain, L., and Krauss, T. F., "Chemical sensing in slotted photonic crystal heterostructure cavities", *Appl. Phys. Lett.* 94, 063503 (2009).
- [2] Jagerska, J., Zhang, H., Diao, Z., Thomas, N. L., and Houdré, R., "Refractive index sensing with an air-slot photonic crystal nanocavity", *Opt. Lett.* 35, 2523-2525 (2010).
- [3] Wang, B., Dündar, M. A., Nötzel, R., Karouta, F., He, S., and van der Heijden, R. W., "Photonic crystal slot nanobeam slow light waveguides for refractive index sensing", *Appl. Phys. Lett.* 97, 151105 (2010).
- [4] Mortensen, N. A. and Xiao, S., "Slow-light enhancement of Beer-Lambert-Bouguer absorption", *Appl. Phys. Lett.* 90, 141108 (2007).
- [5] Pergande, D., Geppert, T. M., Rhein, A. v., Schweizer, S. L., Wehrspohn, R. B., Moretton, S., and Lambrecht, A., "Miniature infrared gas sensors using photonic crystals", *Journal of Appl. Phys.* 109, 083117 (2011).
- [6] Lai, W. C., Chakravarty, S., Wang, X., Lin, C., and Chen, R. T., "On-chip methane sensing by near-IR absorption signatures in a photonic crystal slot waveguide", *Opt. Lett.* 36, 984-986 (2011).
- [7] Tran, Q. V., Combrié, S., Colman, P., and Rossi, A. D., "Photonic crystal membrane waveguides with low insertion losses", *Appl. Phys. Lett.* 95, 061105 (2009).
- [8] Almeida, Q. Xu, C.A. Barrios, and M. Lipson, "Guiding and confining light in void nanostructure," *Opt. Lett.* 29, 1209-1211 (2004).
- [9] Sakoda, K., "Optical Properties of Photonic Crystals", Springer, Heidelberg, 2nd Edition (2005).