

CORRECTION

[View Article Online](#)
[View Journal](#) | [View Issue](#)



Correction: Increasing efficiency of perovskite solar cells using low concentrating photovoltaic systems

Cite this: *Sustainable Energy Fuels*, 2020, 4, 4301

Hasan Baig,^{*a} Hiroyuki Kanda,^b Abdullah M. Asiri,^c Mohammad Khaja Nazeeruddin^b and Tapas Mallick^a

DOI: 10.1039/d0se90048f

Correction for 'Increasing efficiency of perovskite solar cells using low concentrating photovoltaic systems' by Hasan Baig *et al.*, *Sustainable Energy Fuels*, 2020, 4, 528–537, DOI: 10.1039/c9se00550a.

rsc.li/sustainable-energy

Fig. 3c was incorrect in the original submission. Fig. 3 should appear as follows:

^aUniversity of Exeter, Environment and Sustainability Institute, University of Exeter, Penryn, TR10 9FE, UK. E-mail: h.baig@exeter.ac.uk

^bGroup for Molecular Engineering of Functional Materials, Institute of Chemical Sciences and Engineering, École Polytechnique Fédérale de Lausanne, Valais Wallis, CH-1951 Sion, Switzerland

^cCenter of Excellence for Advanced Materials Research (CEAMR), King Abdulaziz University, P.O. Box 80203, 21589 Jeddah, Saudi Arabia



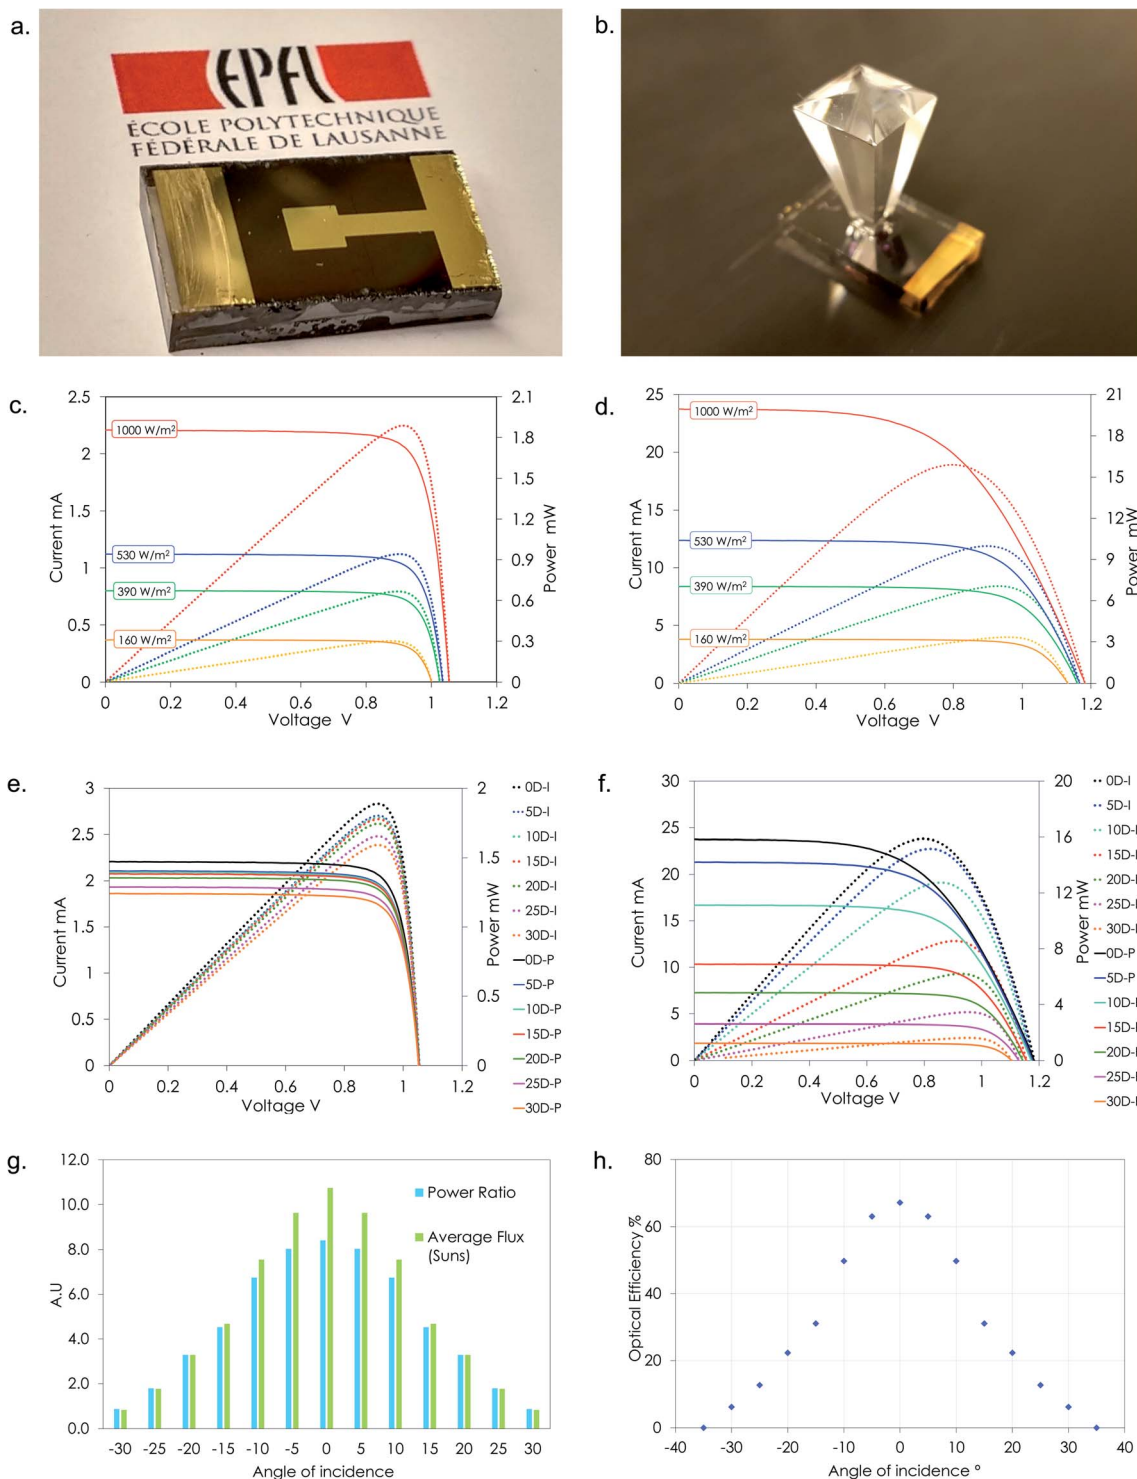


Fig. 3 (a) Zoomed image of the back side of the PSC used in the present study. (b) PSC with a concentrator. (c) *IV* characteristics of the PSC measured at 1000 W m^{-2} , 530 W m^{-2} , 390 W m^{-2} and 160 W m^{-2} . (d) *IV* characteristics of the CPV unit measured at 1000 W m^{-2} , 530 W m^{-2} , 390 W m^{-2} and 160 W m^{-2} . (e) *IV* characteristics of the PSC measured at different inclinations at 1000 W m^{-2} . (f) *IV* characteristics of the CPV unit measured at different inclinations at 1000 W m^{-2} . (g) Power ratio and average flux on the CPV at different angles of incidence. (h) Optical efficiency of the CPV at different angles of incidence.

The Royal Society of Chemistry apologises for these errors and any consequent inconvenience to authors and readers.

